

539,230

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number  
**WO 2004/056645 A1**

(51) International Patent Classification<sup>7</sup>: **B62K 5/04**,  
5/08, B62D 9/02

(21) International Application Number:  
PCT/IB2002/005833

(22) International Filing Date:  
20 December 2002 (20.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **PEDERSEN, Roald, H.** [NO/NO]; Kopperud-  
bakken 7, N-2818 Gjøvik (NO).

GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,  
YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, NL, PT, SE, SI, SK, TR),  
OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: VEHICLE WITH A TITLTABLE CHASSIS

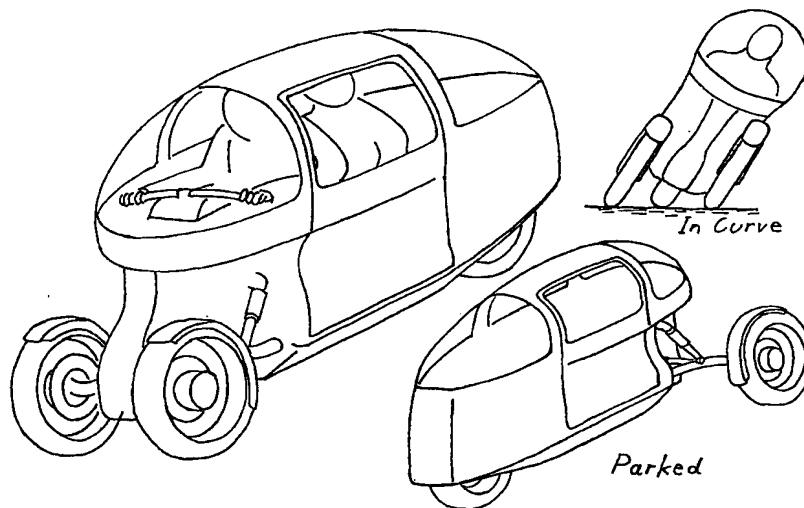

(57) Abstract: Vehicle comprising a chassis, a pair of front wheels and a suspension assembly for connecting said front wheels to said chassis, said suspension assembly being adapted to allow said front wheels to move transverse to their axis of rotation, but in opposite directions, in order to tilt said chassis. According to the invention, said suspension assembly comprises a wheel orientation defining rod being, on the one hand, coupled to a front wheel and, on the other hand, pivotably coupled to said chassis, wherein a coupling of said wheel orientation defining rod to said chassis is positioned to ensure that a wheel orientation defined by said wheel orientation defining rod is essentially independent of said wheel movement transverse to the wheel's axis of rotation.

WO 2004/056645 A1